

# 72MB 365-385 Watt MONO PERC MODULE

Positive power tolerance of 0~+3%

ISO9001:2008, ISO14001:2004, OHSAS18001 certified factory

IEC61215, IEC61730, UL1703 certified product

## PERC



## KEY FEATURES



### 5 Busbar Solar Cell

5 busbar solar cell adopts new technology to improve the efficiency of modules, offers a better aesthetic appearance, making it perfect for rooftop installation.



### High Efficiency

Higher module conversion efficiency (up to 19.42%) benefit from Passivated Emmitter Rear Contact (PERC) technology.



### PID Resistance

Excellent Anti-PID performance guarantee limited power degradation for mass production.



### Low-light Performance:

Advanced glass and surface texturing allow for excellent performance in low-light environment.



### Severe Weather Resilience

Certified to withstand: wind load (2400 Pascal) and snow load (5400 Pascal).




### Durability Against Extreme Environmental Conditions


High salt mist and ammonia resistance certified by TUV NORD.

## LINEAR PERFORMANCE WARRANTY

10 Year Product Warranty • 25 Year Linear Power Warranty

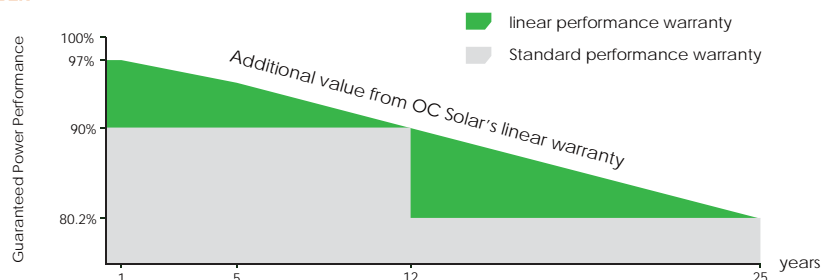

## Engineering Drawings

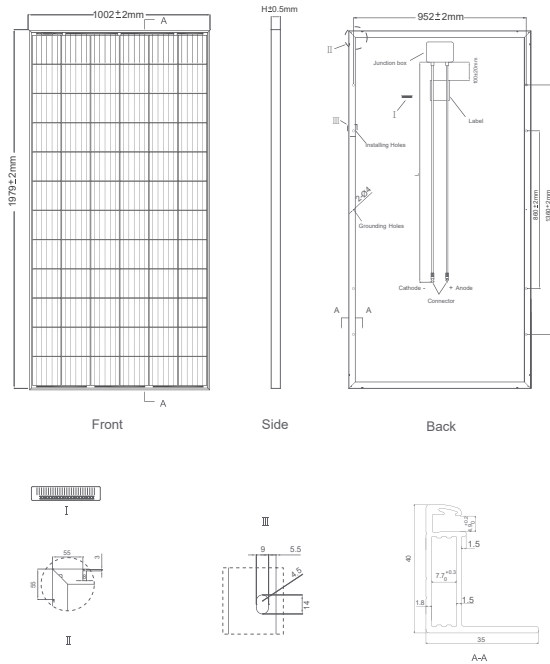


## Packaging Configuration

( Two pallets=One stack )

26pcs/pallet, 52pcs/stack, 572pcs/40'HQ Container

## Electrical Performance & Temperature Dependence

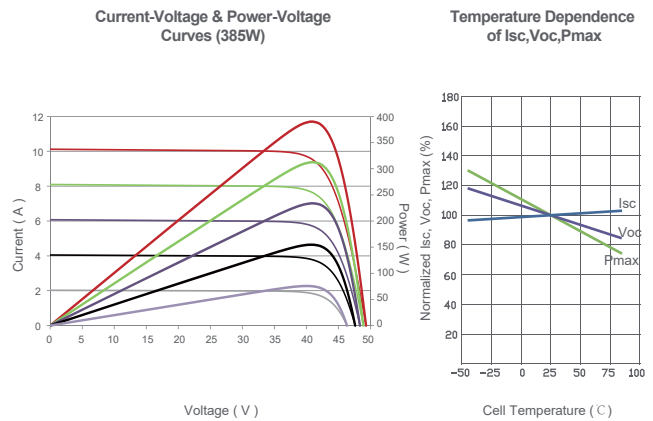

## Mechanical Characteristics

Cell Type	Mono PERC	158.75×158.75mm
No. of cells	72 (6×12)	
Dimensions	1979×1002×40mm (77.91×39.45×1.57 inch)	
Weight	22.5 kg (49.6 lbs)	
Front Glass	3.2mm, Anti-Reflection Coating, High Transmission, Low Iron, Tempered Glass	
Frame	Anodized Aluminium Alloy	
Junction Box	IP67 Rated	
Output Cables	TÜV 1×4.0mm <sup>2</sup> , Length 1200mm or Customized Length	

## SPECIFICATIONS

Module Type	OCM365M-72B		OCM370M-72B		OCM375M-72B		OCM380M-72B		OCM385M-72B	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power (Pmax)	365Wp	274Wp	370Wp	278Wp	375Wp	282Wp	380Wp	286Wp	385Wp	290Wp
Maximum Power Voltage (Vmp)	39.7V	37.9V	39.9V	38.1V	40.2V	38.3V	40.5V	38.6V	40.8V	38.8V
Maximum Power Current (Imp)	9.20A	7.24A	9.28A	7.30A	9.33A	7.36A	9.39A	7.42A	9.44A	7.48A
Open-circuit Voltage (Voc)	48.2V	46.8V	48.5V	47.0V	48.7V	47.2V	48.9V	47.5V	49.1V	47.7V
Short-circuit Current (Isc)	9.57A	7.68A	9.61A	7.75A	9.68A	7.82A	9.75A	7.88A	9.92A	7.95A
Module Efficiency STC (%)	18.41%		18.66%		18.91%		19.16%		19.42%	
Operating Temperature (°C)	-40°C~+85°C									
Maximum System Voltage	1000VDC (IEC)									
Maximum Series Fuse Rating	20A									
Power Tolerance	0~+3%									
Temperature Coefficients of Pmax	-0.37%/°C									
Temperature Coefficients of Voc	-0.28%/°C									
Temperature Coefficients of Isc	0.048%/°C									
Nominal Operating Cell Temperature (NOCT)	45±2°C									

STC: Irradiance 1000W/m<sup>2</sup> Cell Temperature 25°C AM=1.5

NOCT: Irradiance 800W/m<sup>2</sup> Ambient Temperature 20°C AM=1.5 Wind Speed 1m/s

\* Power measurement tolerance: ± 3%